

## Flexible Metal Conduit - Europe Specification (Customized)

Not liquid-tight

### M2012

■ Galvanized steel core, not liquid-tight

### M2013

■ #304 Stainless steel core

### M2016

■ #316 Stainless steel core  
for high corrosion area, e.g. seashore


### Features

#### Construction:

- Square-locked, meets Europe standard dimension
- Small bending radius, high flexibility
- Third party testing: BSI test approval under BS EN 61386
- Stainless steel braiding is available by request

#### Application:

- For mass production equipment and machine tools, or any narrow spaces requiring high flexibility
- For all kinds of industrial or commercial application

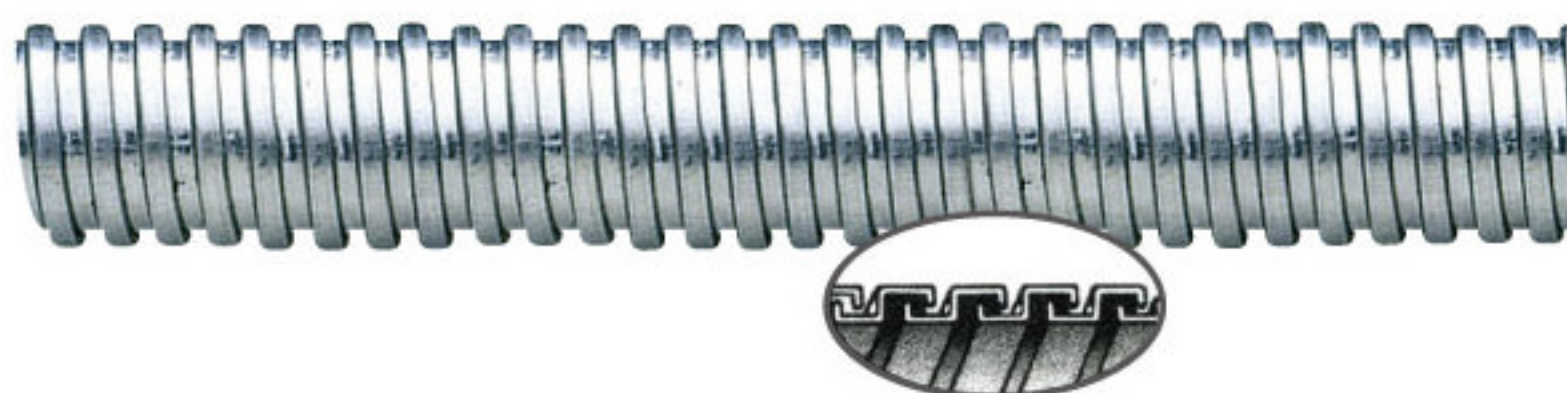

Trade Size	Catalog Number			Min. I.D. (mm)	Max. I.D. (mm)	Min. O.D. (mm)	Max. O.D. (mm)	Min. Bending Radius (mm)	Packing (m)
M12	M20120212	M20130212	M20160212	9.8	10.2	12.8	13.2	25	50
M16	M20120316	M20130316	M20160316	12.7	13.2	15.7	16.2	33	50
M20	M20120420	M20130420	M20160420	16.7	17.2	20.1	20.6	38	50
M25	M20120625	M20130625	M20160625	20.8	21.3	24.6	25.1	45	50
M32	M20121032	M20131032	M20161032	27.8	28.4	32.0	32.6	55	50
M40	M20121240	M20131240	M20161240	37.4	38.0	42.2	42.8	62	30
M50	M20121450	M20131450	M20161450	48.1	48.7	52.9	53.5	110	20
M63	M20122063	M20132063	M20162063	57.1	57.9	62.1	62.9	120	10
M75	M20122475	M20132475	M20162475	70.0	70.8	75.8	76.6	138	10
M100	M20124100	M20134100	M20164100	93.5	94.5	99.7	100.7	150	10