

Threadless Combination Coupling


Features

- Malleable iron or ductile cast iron, zinc plated.



E2101/P2101 Assembly Illustration

EMT/PVC/RSC Conduit + Screw + Body + Ferrule + Gland Packing + Cap Nut + BLISS Flexible Conduit

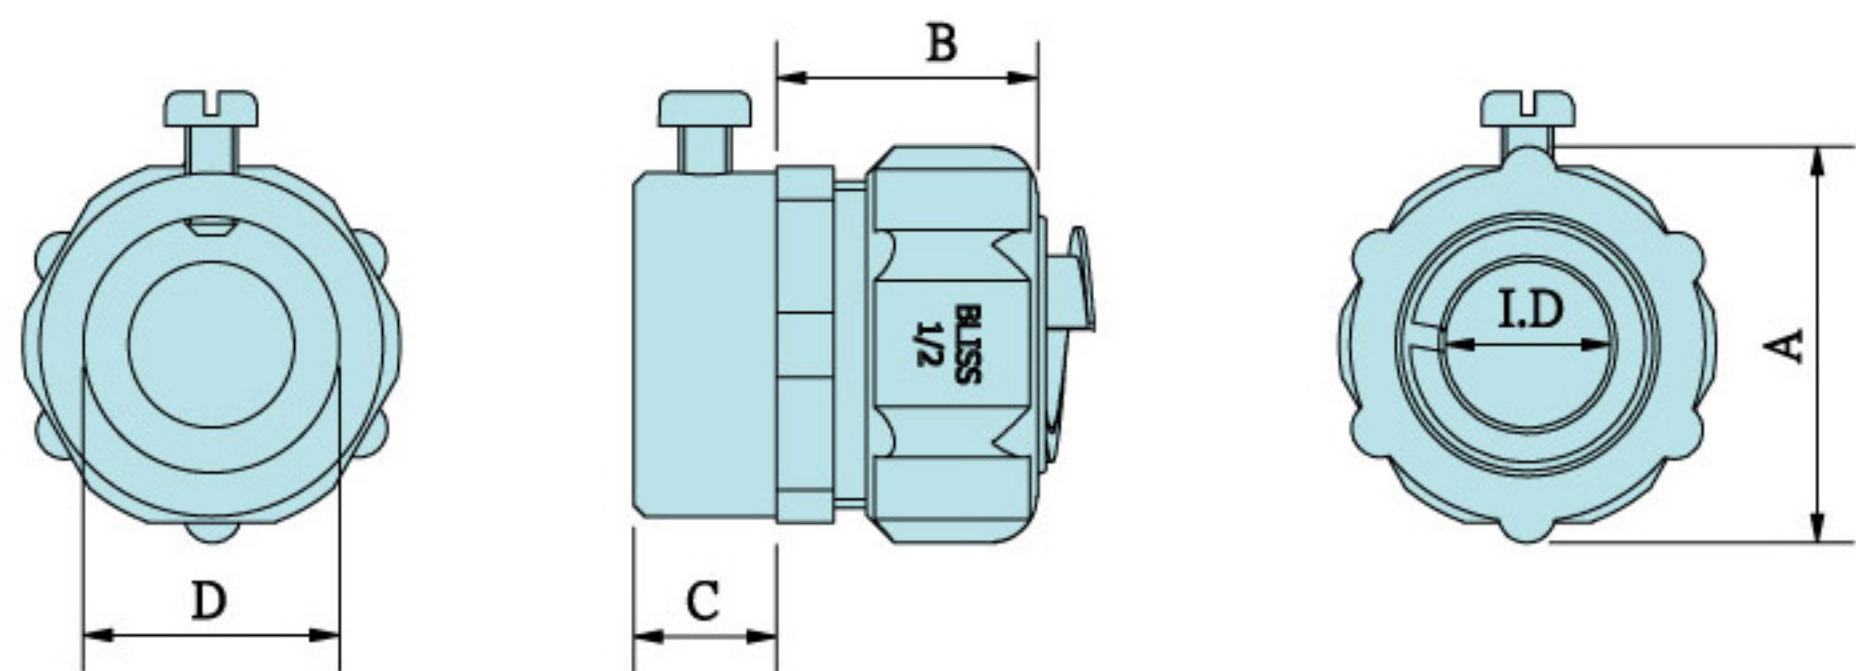

E2101

- For connecting EMT with flexible conduit
- Threadless, furnished with screw
- 2-1/2"~4" same as P2101

Trade Size (inch)	Catalog Number	Dimension (mm)					EMT CNS 2606-C4060 JIS C 8305	Standard Packing (pcs)
		I.D.	A	B	C	D		
1/2"	E21010400	14.5	34.5	22.5	12.5	19.6	E19	50
3/4"	E21010600	19.5	41.5	28.0	14.0	25.9	E25	50
1"	E21011000	25.0	46.0	31.5	17.5	32.3	E31	25
1-1/4"	E21011200	33.5	55.5	34.0	18.0	38.6	E39	25
1-1/2"	E21011400	38.5	63.2	36.5	21.5	51.3	E51	20
2"	E21012000	49.5	76.0	44.5	24.0	64.0	E63	10



P2101

- For connecting RSC/PVC conduit with flexible conduit
- Threadless, furnished with screw

Trade Size (inch)	Catalog Number	Dimension (mm)					RSC CNS 2606-C4060 JIS C 8305	PVC CNS 1302-K3006	Standard Packing (pcs)
		I.D.	A	B	C	D			
1/2"	P21010400	14.5	34.5	22.5	12.5	22.4	G16	16	50
3/4"	P21010600	19.5	41.5	28.0	14.0	27.2	G22	20	50
1"	P21011000	25.0	46.0	31.5	17.5	34.5	G28	28	25
1-1/4"	P21011200	33.5	55.5	34.0	18.0	42.6	G36	35	25
1-1/2"	P21011400	38.5	63.2	36.5	21.5	48.6	G42	41	20
2"	P21012000	49.5	76.0	44.5	24.0	60.8	G54	52	10
2-1/2"	P21012400	60.0	99.2	58.5	33.5	76.8	G70	65	1
3"	P21013000	75.0	118.3	60.5	35.0	90.0	G82	80	1
4"	P21014000	97.0	145.3	58.0	38.0	115.0	G104	100	1